


Step 1

Make sure you have the latest version of EFI Live Scan and Tune Downloaded and installed on your computer. [HERE](#) is a link, however it could be an older version by the time you read this. You will also download EFI Live Explorer at the same time.



Step 2

Plug the Autocal into your computer using the USB cable provided with the tuner. Save the File you've been provided (XXXXX.bbx) onto your computer somewhere you will be able to find it.

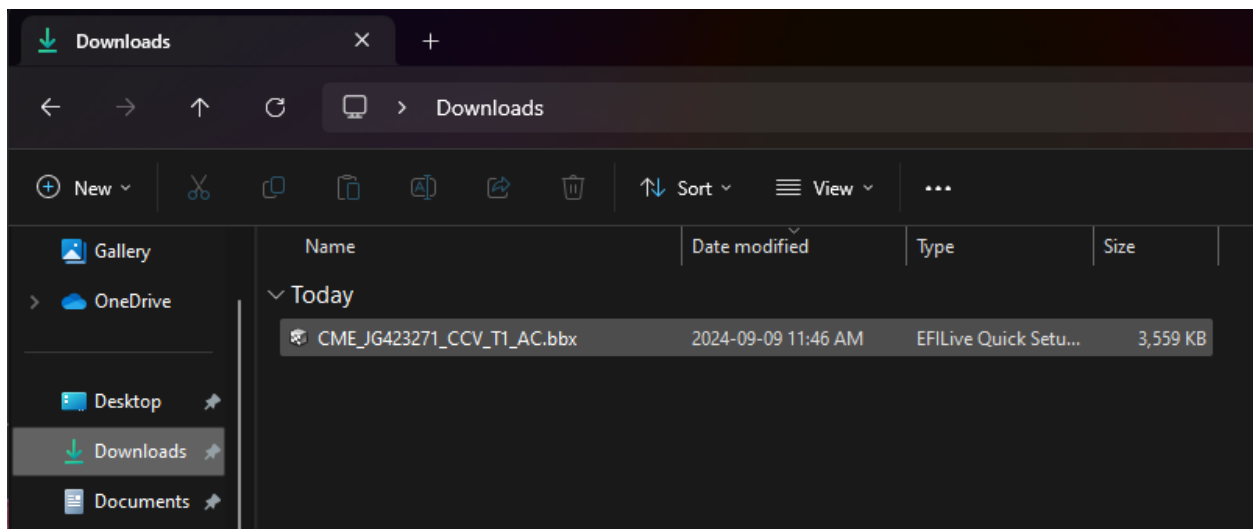

Step 3

Open up EFI Live Scan and Tune and select the EFI Live Control Panel button from the top right area of the window. This will open another window for you. Select **F6 Firmware** on the left side. This will tell you if your device needs updating. If so, proceed to updating the device and then close the windows.

The screenshot shows the EFI Live Control Panel application window. At the top, there is a blue header bar with three buttons: "Explorer" (with a laptop icon), "Control Panel" (with a smartphone icon and a blue border), and "About V8.4.53" (with a person icon). Below the header, the main window is titled "EFILive Control Panel" and features a large banner with the "EFILive" logo, a "Scan" button with a speedometer icon, a "Log" button with a line graph icon, and a "Tune" button with a 3D bar chart icon. On the left side, there is a vertical menu with buttons labeled F2 through F10: "F2: USB", "F3: USB Testing", "F4: Options", "F5: Calibrate A/D", "F6: Firmware" (which is highlighted with a blue background), "F7: Licensing", "F8: Trace", "F9: LCD Capture", and "F10: About". The main content area on the right displays a table of connected devices. The table has four columns: "Device name", "Status", "Bootblock", and "Firmware". It lists two devices: "FlashScan" (Status: Not Connected) and "AutoCal V3" (Status: Connected). Below the table, there are two sections: "AutoCal Boot Block" and "AutoCal Firmware". Each section shows the current version and date, and a status message indicating if the version is OK. At the bottom right, there is a "Devices" button with a binoculars icon.

Device name	Status	Bootblock	Firmware
✗ FlashScan	Not Connected		
✓ AutoCal V3	Connected	3.00.006	3.00.122

AutoCal Boot Block

Version: 3.00.006 Date: Feb 22, 2022

Boot block version is OK.

AutoCal Firmware


Version: 3.00.122 Date: May 05, 2024

Firmware version is OK.


Devices

Step 4

Find the file you have saved and double click on it. This will open EFI Live Scan and Tune and automatically open the page you need. Select **Program Quick Setup** on the lower portion of the window. It will prompt you that you are going to overwrite this Autocal, press yes and the program will load the tune file and all the settings onto the device for you.

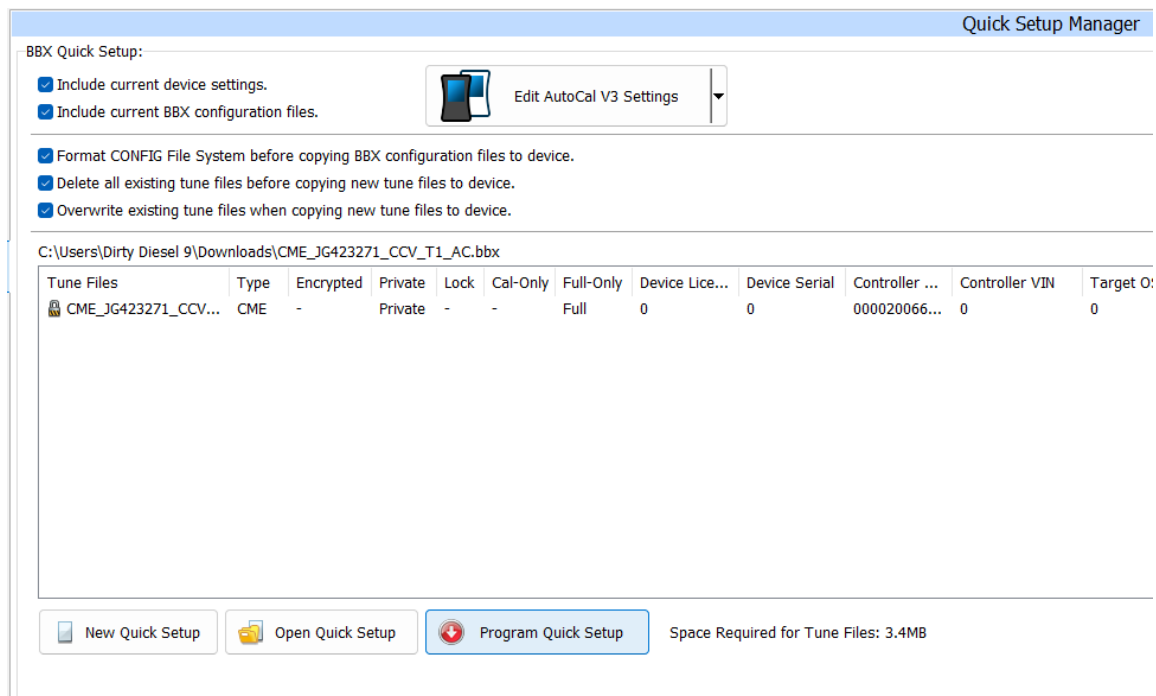

When you encounter this message, select "Yes"

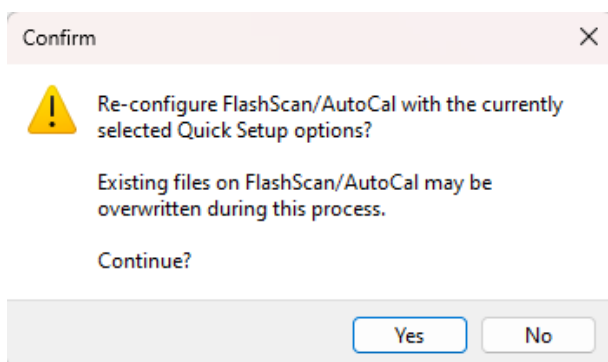

Step 5

Once this is completed, you can unplug the Autocal and it is ready to be loaded into the truck.

<https://www.efilive.com/download-efilive>

